



DIN 6912

Zylinderschrauben

mit Innensechskant, niedrigem Kopf und Schlüsselführung

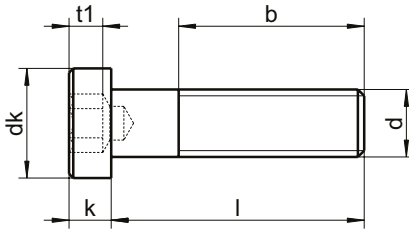

dk	7	8,5	10	13	16	18	24	30	36
k	2,8	3,5	4	5	6,5	7,5	10	12	14
s	3	4	5	6	8	10	14	17	19
t1	1,6	2	2,5	3	3,5	4	5,5	6,5	7
dh	2	2,5	3	4	5	6	8	10	12
b	14	16	18	22	26	30	38	46	54
●	3	4	5	6	8	10	14	17	19
Länge / Ø	M4	M5	M6	M8	M10	M12	M16	M20	M24
6	▲ ●	▲							
8	▲ ●	▲ ●	▲ ●						
10	▲ ●	▲ ●	▲ ●	▲ ●					
12	▲ ●	▲ ●	▲ ●	▲ ●					
14	▲	▲ ●	▲ ●	▲ ●					
16	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
18	▲		▲						
20	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
22	▲								
25	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●		
30	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲	
35	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
40	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
45		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
50		▲	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	●
55			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●		
60			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
65			▲					▲	
70		●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
80			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
90				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
100				▲ ●	●	▲ ●	▲ ●	▲ ●	
110							●	●	
120							●	●	
130							●	●	
140							▲ ●	●	
150							▲ ●		

▲ A2 / ● A4 | Alle Maße in mm | Weitere Abmessungen auf Anfrage

Beispiel Art.-Nr.: 6912-2-8X40 DIN 6912 - A2 - M8 - l = 40mm