



Bohrschrauben

mit Senkkopf und TX-Antrieb

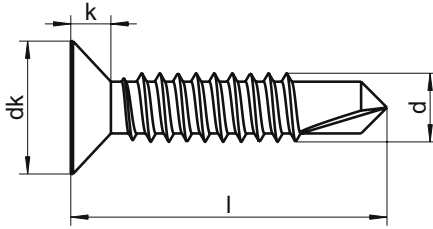

dk max.	6,8	7,5	8,1	9,5
k max.	2,1	2,3	2,5	3,0
☼	TX 10	TX 20	TX 20	TX 25
Länge / Ø	ST3,5	ST3,9	ST4,2	ST4,8
13 (1/2")	▲	▲	▲	▲
16 (5/8")	▲	▲	▲	▲
19 (3/4")	▲	▲	▲	▲
22 (7/8")	▲	▲	▲	▲
25 (1")	▲	▲	▲	▲
32 (1 1/4")		▲	▲	▲
38 (1 1/2")		▲	▲	▲
45 (1 3/4")				▲
50 (2")				▲
SU	1000	1000 ≥ 32 500	1000 ≥ 32 500	500 ≥ 32 200

■ A1 / ▲ A2 / ● A4 | VE: Verkaufseinheit | Alle Maße in mm / Zoll | Weitere Abmessungen auf Anfrage

Beispiel Art.-Nr.: 9167-2-4,2X38 WS 9167 - A2 - Ø 4,2mm - l = 38mm