


# DIN 7984

## Zylinderschrauben

mit Innensechskant und niedrigem Kopf

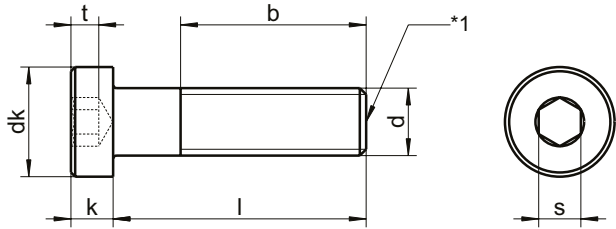

|           |     |     |     |     |     |     |     |     |
|-----------|-----|-----|-----|-----|-----|-----|-----|-----|
| dk        | 5,5 | 7   | 8,5 | 10  | 13  | 16  | 18  | 30  |
| k         | 2   | 2,8 | 3,5 | 4   | 5   | 6   | 7   | 11  |
| s         | 2   | 2,5 | 3   | 4   | 5   | 7   | 8   | 14  |
| t         | 1,5 | 2,3 | 2,7 | 3   | 3,8 | 4,5 | 5   | 7,5 |
| b         | 12  | 14  | 16  | 18  | 22  | 26  | 30  | 46  |
| ●         | 2   | 2,5 | 3   | 4   | 5   | 7   | 8   | 14  |
| Länge / Ø | M3  | M4  | M5  | M6  | M8  | M10 | M12 | M20 |
| 5         | ▲   |     |     |     |     |     |     |     |
| 6         | ▲ ● | ▲ ● | ▲   |     |     |     |     |     |
| 8         | ▲ ● | ▲ ● | ▲ ● | ▲ ● |     |     |     |     |
| 10        | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲ ● |     |     |     |
| 12        | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲ ● |     |     |     |
| 14        | ▲ ● | ▲   | ▲   | ▲   |     |     |     |     |
| 16        | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲ ● |     |     |
| 20        | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲   |     |
| 25        | ▲   | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲   |     |
| 30        | ▲   | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲   |     |
| 35        | ▲   | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲   |     |
| 40        | ▲   | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ▲   | ▲   |
| 45        |     |     | ▲ ● | ▲ ● | ▲ ● | ▲ ● |     |     |
| 50        |     |     | ▲ ● | ▲ ● | ▲ ● | ▲ ● | ●   | ▲   |
| 55        |     |     |     | ▲ ● | ▲ ● | ▲ ● |     |     |
| 60        |     |     | ▲   | ▲ ● | ▲ ● | ▲ ● |     |     |
| 70        |     |     |     | ▲ ● | ▲ ● | ▲ ● |     |     |
| 80        |     |     |     |     | ▲ ● | ▲ ● |     |     |
| 140       |     |     |     |     |     |     |     |     |

▲ A2 / ● A4 | Alle Maße in mm | Weitere Abmessungen auf Anfrage  
Beispiel Art.-Nr.: 7984-2-8X40 DIN 7984 - A2 - M8 - l = 40mm