


DIN 908 G

Verschlusssschrauben

mit Bund, Innensechskant und zylindrischem Rohrgewinde

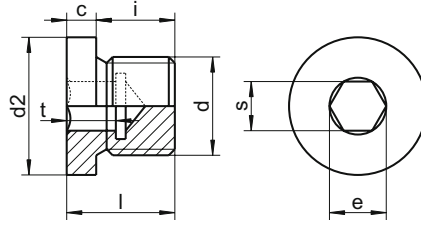

d	d2	s	e	l	t	c	i	⌀
G1/8"	14	5	5,7	11	5,0	3	8	5
G1/4"	18	6	6,9	15	7,0	3	12	6
G3/8"	22	8	9,2	15	7,5	3	12	8
G1/2"	26	10	11,4	18	7,5	4	14	10
G3/4"	32	12	13,7	20	9,0	4	16	12
G1"	39	17	19,4	21	9,0	5	16	17
G1 1/4"	49	22	25,2	21	10,5	5	16	22
G1 1/2"	55	24	27,4	21	10,5	5	16	24
G1 3/4"	62	32	36,6	25	14,0	5	20	32
G2"	68	32	36,6	25	14,0	5	20	32

Güte	SU
▲ ●	50
▲ ●	50
▲ ●	25
▲ ●	50
▲ ●	25
▲ ●	10
▲ ●	5
▲ ●	5
▲ ●	5
▲ ●	5

■ A1 / ▲ A2 / ● A4 | VE: Verkaufseinheit | Alle Maße in mm / Zoll | Weitere Abmessungen auf Anfrage

Beispiel Art.-Nr.: 908-2-3/4 DIN 908 - A2 - Ø 3/4"