


Ähnl. ISO 4028 - **DIN 915**
Gewindestifte

mit Innensechskant und Zapfen

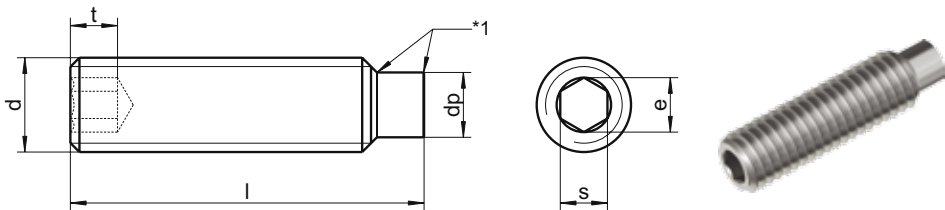

dp	0,75	1,25	1,75	2,25	3,20	3,70	5,20	6,64	8,14	11,57	14,57
t min.	0,8	1,2	1,2	1,5	2,0	2,0	3,0	4,0	4,8	6,4	8,0
t max.	1,7	2,0	2,0	2,5	3,0	3,5	5,0	6,0	8,0	10,0	12,0
s	0,9	1,3	1,5	2	2,5	3	4	5	6	8	10
e	1,0	1,4	1,7	2,3	2,9	3,4	4,6	5,7	6,9	9,2	11,4
●	0,9	1,3	1,5	2	2,5	3	4	5	6	8	10
Länge / Ø	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	M16	M20
3	▲●	▲●	▲●								
4	▲●	▲●	▲●	▲●							
5	▲●	▲●	▲●	▲●	▲●						
6	▲●	▲●	▲●	▲●	▲●	▲●					
8	▲●	▲●	▲●	▲●	▲●	▲●	▲●				
10	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●			
12	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●		
14	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●		
16	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
20			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
25			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
30			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
35						▲●	▲●	▲●	▲●	▲●	▲●
40						▲●	▲●	▲●	▲●	▲●	▲●
45						▲●	▲●	▲●	▲●	▲●	▲●
50						▲●	▲●	▲●	▲●	▲●	▲●
60						▲●	▲●	▲●	▲●	▲●	▲●
70									▲●	▲●	▲●
90										▲●	▲●
100										▲●	▲●
SU	500	500	500 ≥ 30 200	200	200	200	100	100	50	25	25

■ A1 / ▲ A2 / ● A4 | VE: Verkaufseinheit | Alle Maße in mm | Weitere Abmessungen auf Anfrage
Beispiel Art.-Nr.: 915-2-8X40 DIN 915 - A2 - M8 - l = 40mm