


DIN 912 AD2000-W2 - Ähnl. ISO 4762

Zylinderschrauben

mit Innensechskant nach AD2000-W2

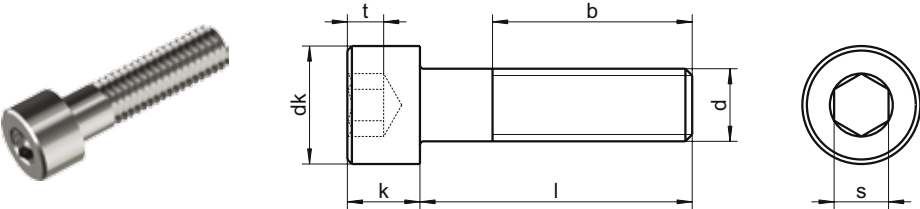

dk max.	8,5	10,0	13,0	16,0	18,0	24,0	30,0
k max.	5,0	6,0	8,0	10,0	12,0	16,0	20,0
s	4	5	6	8	10	14	17
b	22	24	28	32	36	44	52
t	2,5	3,0	4,0	5,0	6,0	8,0	10,0
●	4	5	6	8	10	14	17
Länge / Ø	M5	M6	M8	M10	M12	M16	M20
8	▲ ●						
10	▲ ●	▲ ●	▲ ●				
12	▲ ●	▲ ●	▲ ●				
16		▲ ●	▲ ●	▲ ●			
20		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
25		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
30		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
35			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
40			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
70				▲ ●	▲ ●	▲ ●	▲ ●
80				▲ ●	▲ ●	▲ ●	▲ ●
90				▲ ●	▲ ●	▲ ●	▲ ●
100				▲ ●	▲ ●	▲ ●	▲ ●
SU	500	200	200 ≥ 25 100	100 ≥ 50 50	100 ≥ 50 50 ≥ 80 25	25	25

■ A1 / ▲ A2 / ● A4 | VE: Verkaufseinheit | Alle Maße in mm | Weitere Abmessungen auf Anfrage
Beispiel Art.-Nr.: 912-2-8X40 DIN 912 - A2 - M8 - l = 40mm - nach AD2000-W2