


Zylinderschrauben

mit Innensechskant

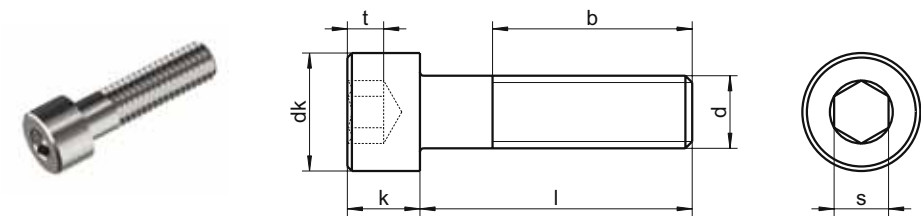



dk max.	3,0	3,8	4,5	5,5	7,0	8,5	10,0	13,0	16,0	18,0	21,0	24,0	27,0
k max.	1,6	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0	12,0	14,0	16,0	18,0
s	1,5	1,5	2	2,5	3	4	5	6	8	10	12	14	14
b	15	16	17	18	20	22	24	28	32	36	40	44	48
t	0,7	1,0	1,1	1,3	2,0	2,5	3,0	4,0	5,0	6,0	7,0	8,0	9,0
●	1,5	1,5	2	2,5	3	4	5	6	8	10	12	14	14
Länge / Ø	M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18
3	▲ ●	▲ ●											
4	▲ ●	▲ ●	▲ ●	▲ ●									
5	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●								
6	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●						
8	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●						
10	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●					
12	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●				
14	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●				
16	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
18		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
20		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
22			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
25			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
30				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
35				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
40				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
55					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
65					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
70					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
75					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
SU	1000	1000	1000	1000 ≥ 45 500	1000 ≥ 35 500	500 ≥ 45 200	500 ≥ 45 200 ≥ 75 100	200 ≥ 45 100	100	100 ≥ 55 50	25	25	25

■ A1 / ▲ A2 / ● A4 | VE: Verkaufseinheit | Alle Maße in mm | Weitere Abmessungen auf Anfrage
Beispiel Art.-Nr.: 912-2-8X40 DIN 912 - A2 - M8 - l = 40mm

Ähnl. ISO 4762 - **DIN 912** - Seite 2

Zylinderschrauben

mit Innensechskant

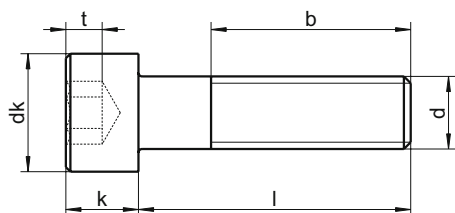


dk max.	8,5	10,0	13,0	16,0	18,0	21,0	24,0	27,0
k max.	5,0	6,0	8,0	10,0	12,0	14,0	16,0	18,0
s	4	5	6	8	10	12	14	14
b	22	24	28	32	36	40	44	48
t	2,5	3,0	4,0	5,0	6,0	7,0	8,0	9,0
●	4	5	6	8	10	12	14	14
Länge / Ø	M5	M6	M8	M10	M12	M14	M16	M18
80	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
85	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
90	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
95	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
100	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
110		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
120		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
130		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
140		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
150		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
160		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
170		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
180		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
190		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
200		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
210			▲ ●	▲ ●	▲ ●			
220			▲ ●	▲ ●	▲ ●			
230			▲ ●	▲ ●	▲ ●			
240			▲ ●	▲ ●	▲ ●			
250			▲ ●	▲ ●	▲ ●			
260			▲ ●	▲ ●	▲ ●			
270			▲ ●	▲ ●	▲ ●			
280			▲ ●	▲ ●	▲ ●			
300			▲ ●	▲ ●	▲ ●			
SU	200	100	100 ≥ 95 50	50	50 ≥ 100 25	25	25	25

■ A1 / ▲ A2 / ● A4 | VE: Verkaufseinheit | Alle Maße in mm | Weitere Abmessungen auf Anfrage
 Beispiel Art.-Nr.: 912-2-8X40 DIN 912 - A2 - M8 - l = 40mm

DIN 912 - Seite 3 - Ähnl. ISO 4762

Zylinderschrauben

mit Innensechskant

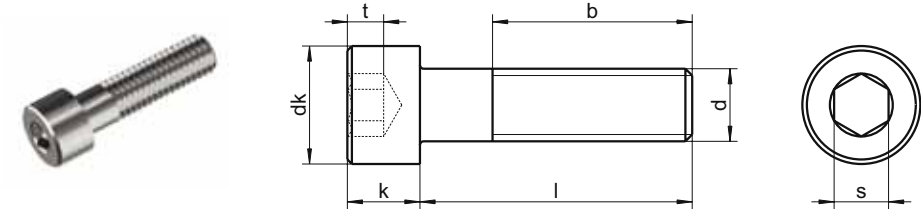

dk max.	30,0	36,0	40,0	45,0
k max.	20,0	24,0	27,0	30,0
s	17	19	19	22
b	52	60	66	72
t	10,0	12,0	13,5	15,5
●	17	19	19	22
Länge / Ø	M20	M24	M27	M30
30	▲ ●			
35	▲ ●			
40	▲ ●	▲ ●		
45	▲ ●	▲ ●		
50	▲ ●	▲ ●	▲ ●	▲ ●
55	▲ ●	▲ ●	▲ ●	▲ ●
60	▲ ●	▲ ●	▲ ●	▲ ●
65	▲ ●	▲ ●	▲ ●	▲ ●
70	▲ ●	▲ ●	▲ ●	▲ ●
75	▲ ●	▲ ●	▲ ●	▲ ●
80	▲ ●	▲ ●	▲ ●	▲ ●
85	▲ ●	▲ ●	▲ ●	▲ ●
90	▲ ●	▲ ●	▲ ●	▲ ●
95	▲ ●	▲ ●	▲ ●	▲ ●
100	▲ ●	▲ ●	▲ ●	▲ ●
110	▲ ●	▲ ●	▲ ●	▲ ●
120	▲ ●	▲ ●	▲ ●	▲ ●
130	▲ ●	▲ ●	▲ ●	▲ ●
140	▲ ●	▲ ●	▲ ●	▲ ●
150	▲ ●	▲ ●	▲ ●	▲ ●
160	▲ ●	▲ ●	▲ ●	▲ ●
170	▲ ●	▲ ●	▲ ●	▲ ●
180	▲ ●	▲ ●	▲ ●	▲ ●
190	▲ ●	▲ ●	▲ ●	▲ ●
200	▲ ●	▲ ●	▲ ●	▲ ●
SU	25 ≥ 100 10	10 ≥ 140 5	5	5

■ A1 / ▲ A2 / ● A4 | VE: Verkaufseinheit | Alle Maße in mm | Weitere Abmessungen auf Anfrage

Beispiel Art.-Nr.: 912-2-8X40 DIN 912 - A2 - M8 - l = 40mm